

SH1 & DMS1

POWER AND CABLE
MANAGEMENT TRACK

EUBIQ PTE LTD
9 Joo Koon Crescent
Singapore 629025
Tel : +65 6372 9393
Fax : +65 6372 9399
Email : info@eubiq.com

EUBIQ MIDDLE EAST FZCO
FZS1 BJ03 PO Box 18524
Jebel Ali Free Zone Dubai - UAE
Tel : +971 4 886 0955
Fax : +971 4 886 0956
Email : info@eubiqme.com

www.eubiq.com

www.eubiqme.com

EXPERIENCE THE ART OF CABLE MANAGEMENT

SH1 & DMS1

PREMIUM CABLE MANAGEMENT SYSTEM

Designed for use with the Modular SFC2 GSS System Power Track, the DMS1 and SH1 series are engineered to exceed the highest standards of modern cable management requirements. DMS1 and SH1 series are easy and quick to install. Snap-on Corner Joints and Multimedia Connectors makes DMS1 and SH1 series the most sophisticated system in the world.

DMS1 APPLICATIONS

Galleries	Retail Outlets
Banks	Showrooms
Libraries	Classrooms
Hotels	
Lounges	

SH1 APPLICATIONS

System Furniture	Test Laboratories
Workstations	Assembly Plants
Home Offices	Workshops
Kitchen	
Pantry	

AWARDS



Flexible

Premium Finishing

Modular Concept

Innovative

Durable

DMS1 POWER AND CABLE MANAGEMENT TRACK


FEATURES

- Skirting mount or dado mid-height mounting
- Dual compartments
- EMI shielded
- Precise alignment of trunking runs with corner links
- Snap-on multimedia connectors
- Durable and Premium finishing
- UPS - Uninterrupted Power Supply

OPTION 1



OPTION 2

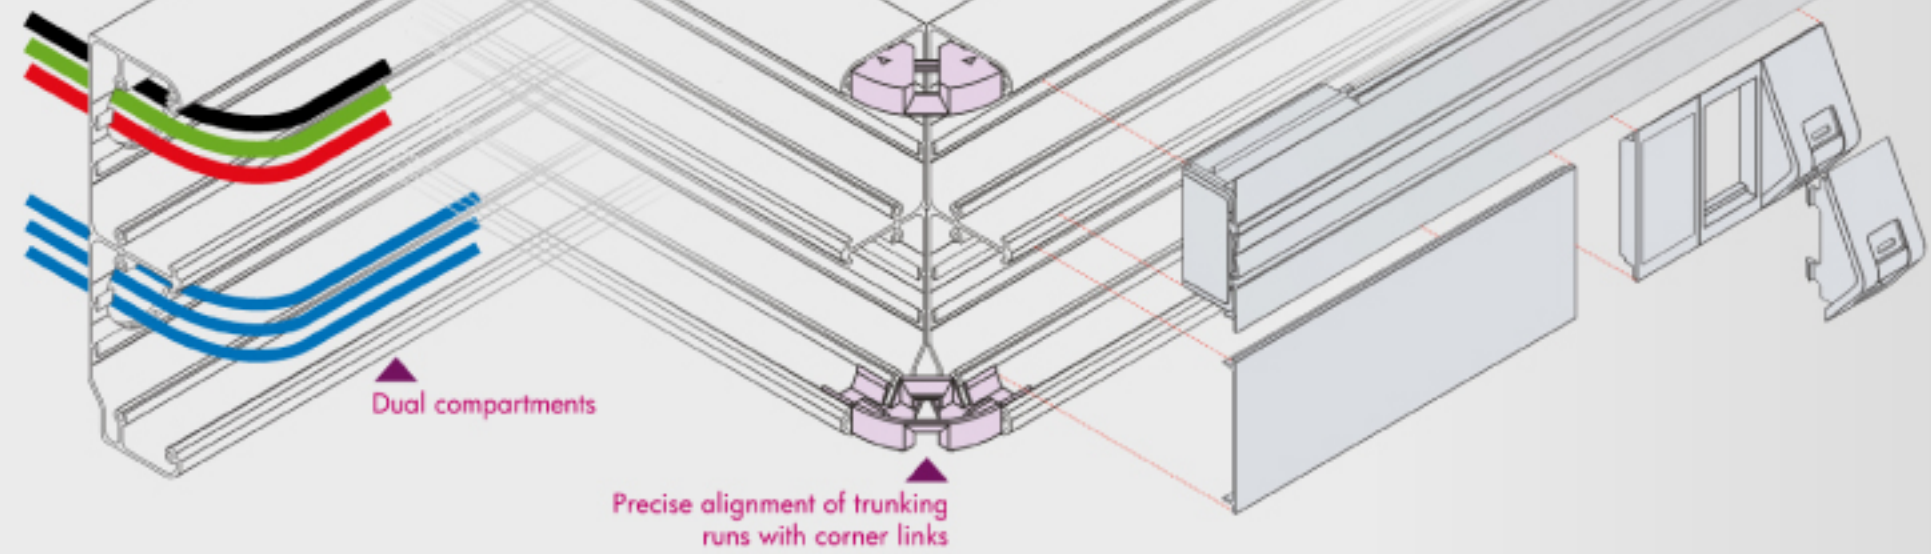

SH1 POWER AND CABLE MANAGEMENT TRACK

FEATURES


- Dado mid-height mounting
- Snap-on multimedia connectors
- Precise alignment of trunking runs with corner links
- Built-in accessory rail
- EMI shielded
- Durable and Premium finishing
- UPS - Uninterrupted Power Supply

OPTION 1




Accessory rail & hooks

Precise alignment of trunking runs with corner links

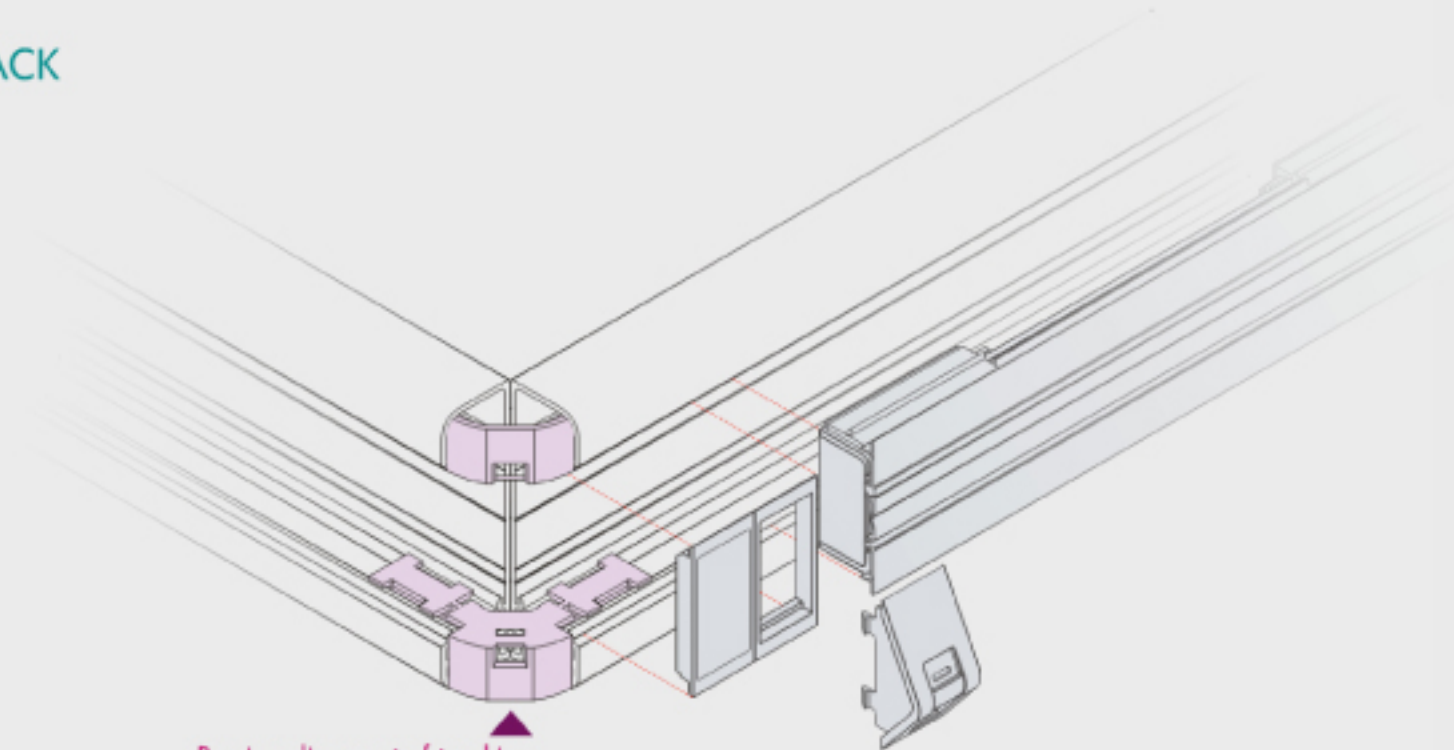

DMS1

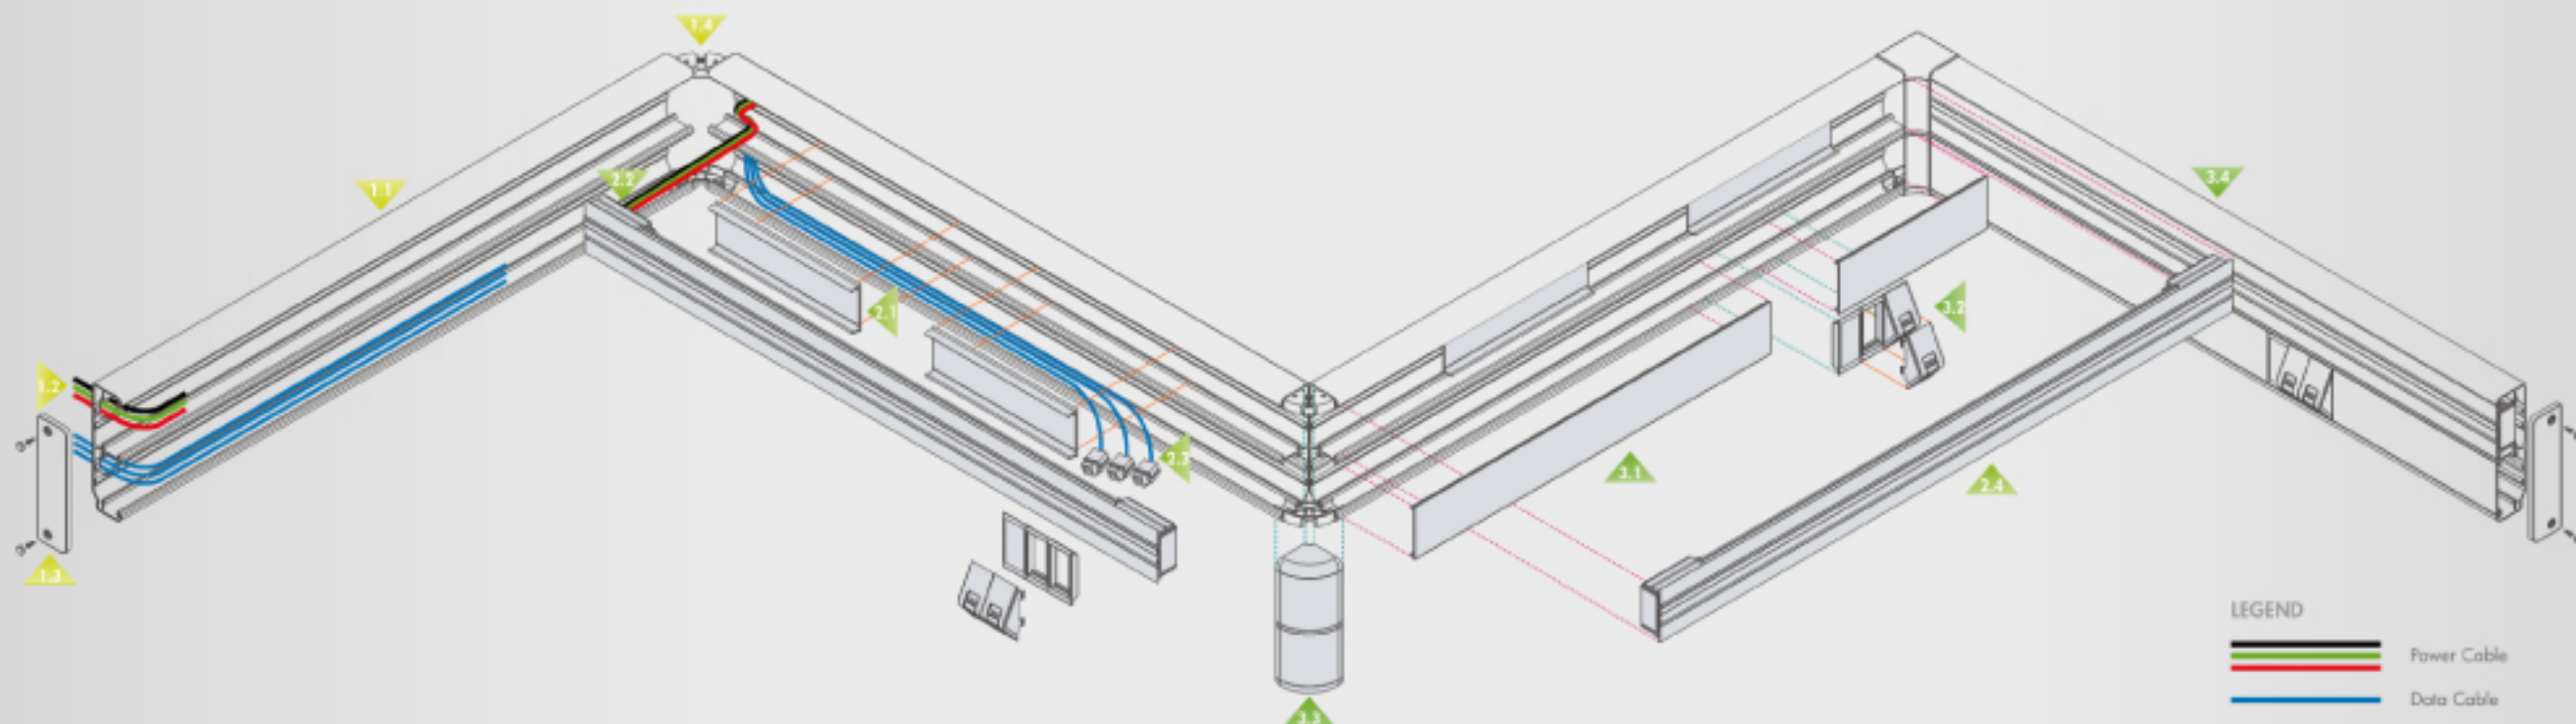

INSTALLATION SEQUENCE



- 1.1 Mount housing.
- 1.2 Layout power and data cables.
- 1.3 Secure End Caps.
- 1.4 Secure Corner Links.

STEP 1


- 2.1 Secure back plate to housing.
- 2.2 Terminate power supply to SFC2 Track.
- 2.3 Terminate data cables to keystone jack.
- 2.4 Snap on SFC2 Track to back plate.

STEP 2

- 3.1 Secure Dummy Covers.
- 3.2 Secure DS3/DS4 Datacom Socket to housing.
- 3.3 Secure internal/external corner caps.
- 3.4 Installation completed.

STEP 3

SH1

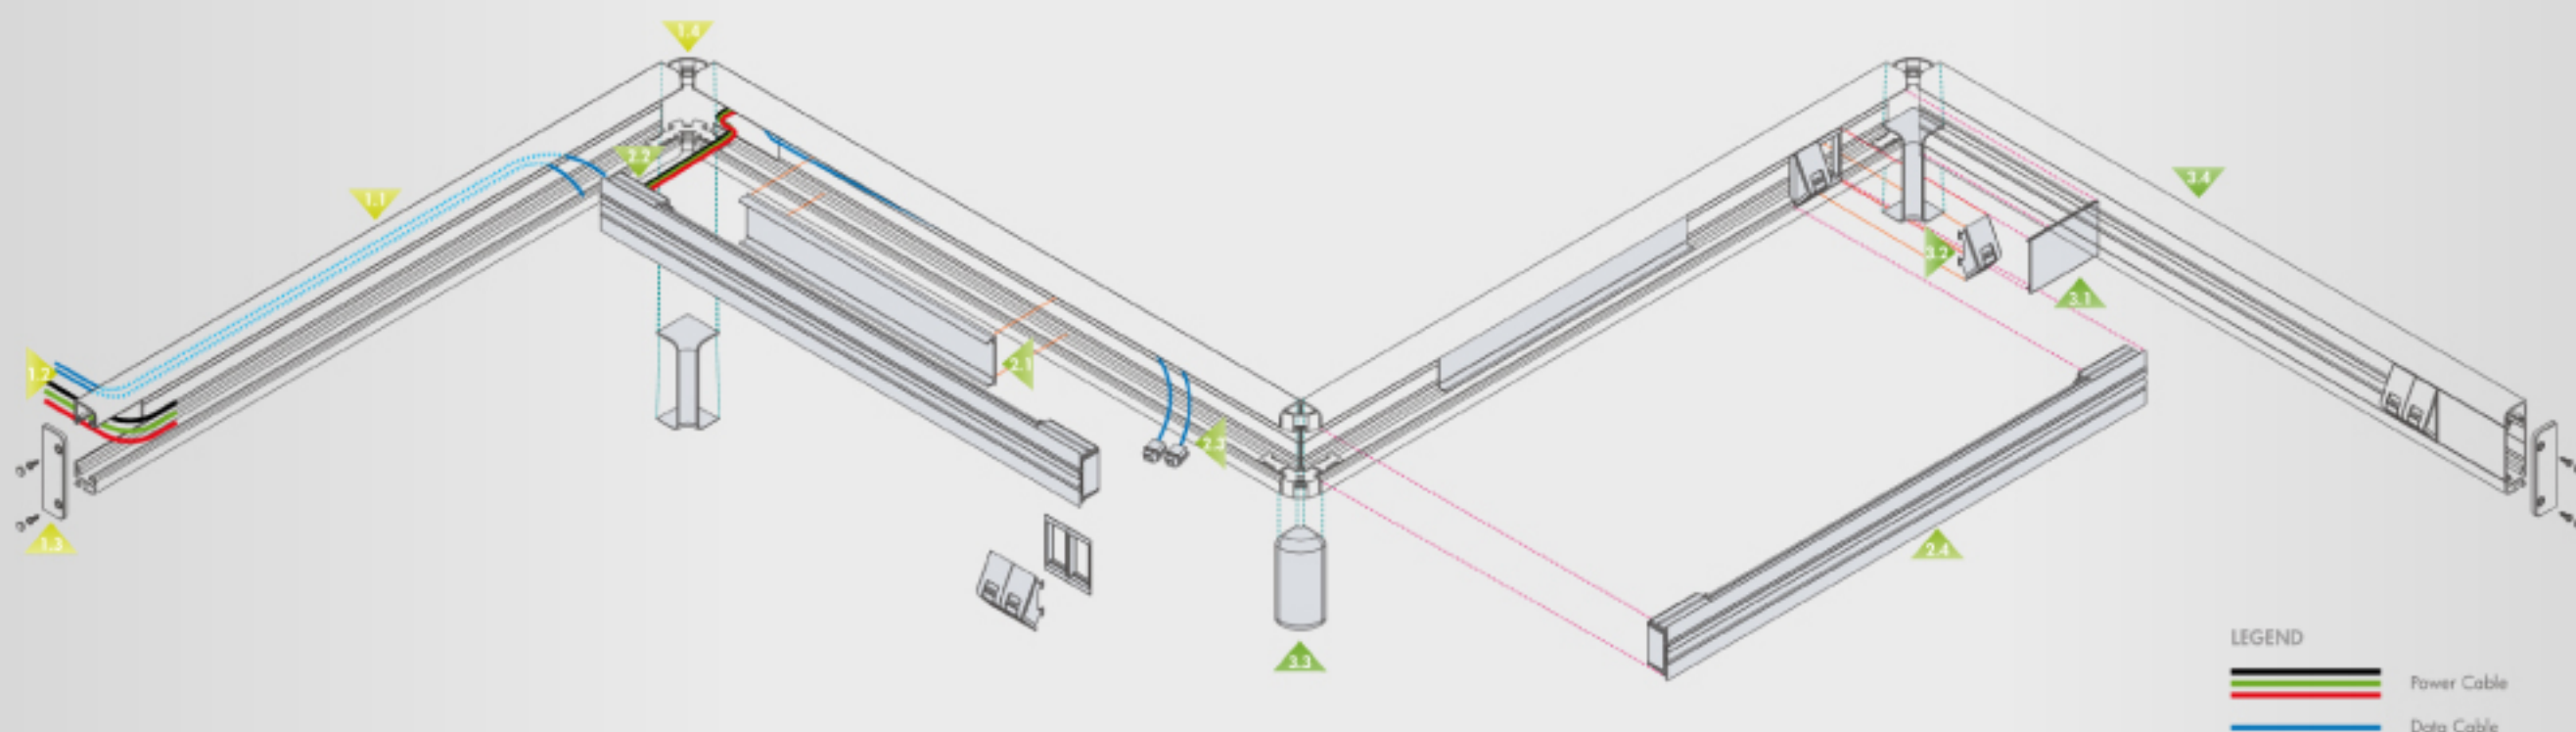

SH1

SPECIFICATIONS

Model Number : SH1
Order Number : TPFX128

PRODUCT FEATURES

Standard Finishing : **NSB** Natural Shot Blast
Customised Length : Maximum length is 3600mm
Please contact local Agent/Distributor for more information

Special Finishings : **WSB** White Shot Blast
THL Titanium Hair Line
BHL Black Hair Line

Customised Length : Maximum length is 2400mm
Please contact local Agent/Distributor for more information

ELECTRICAL


Rated Voltage : 250V a.c. Single-phase
Rated Current : 40Amp maximum
Frequency : 50Hz / 60Hz

MATERIAL


Basic Housing Profile : Aluminium
Track Insulation : Polycarbonate

SIZE AND WEIGHT

Overall Dimension : 100mm x 28.5mm x 1000mm
(Width x Depth x Length)
Weight : Estimated 2.2 kg
Warranty : 3 years subject to Eubiq Limited Warranty Statement (Applicable to track only)

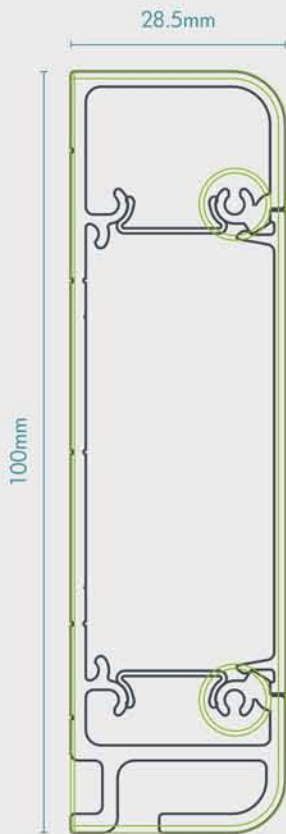

ACTUAL SIZE

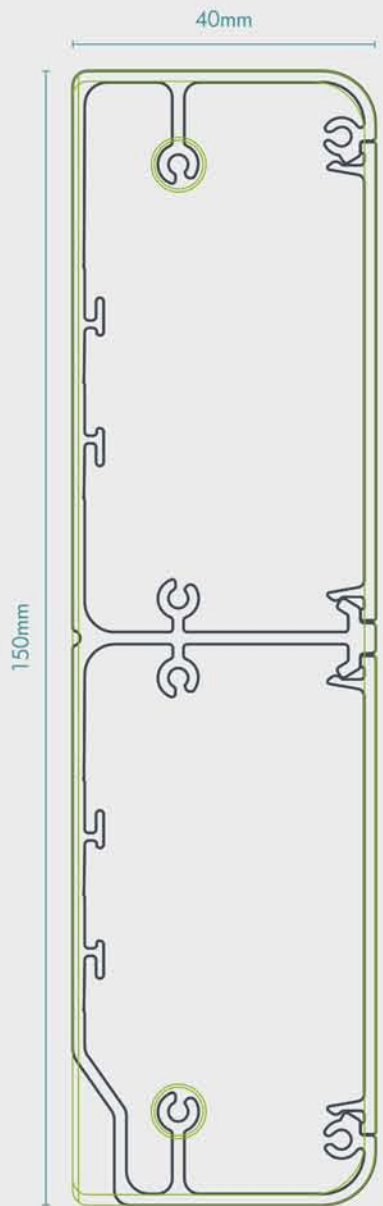

ACTUAL SIZE

STANDARD LENGTH (mm)	HOUSING		SFC2 TRACK		SFC2b BLANK COVER	
	NSB	THL	NSB	THL	NSB	THL
400	-	-	•	•	-	-
600	-	-	•	•	-	-
800	-	-	•	•	-	-
1000	-	-	•	•	-	-
1200	-	-	•	•	-	-
1400	-	-	•	•	-	-
1600	-	-	•	•	-	-
1800	-	-	•	•	-	-
2000	-	-	•	•	-	-
2200	-	-	•	•	-	-
2400	-	•	•	•	-	•
2600	-	-	-	-	-	-
2800	-	-	-	-	-	-
3000	-	-	-	-	-	-
3200	-	-	-	-	-	-
3400	-	-	-	-	-	-
3600	•	-	-	-	•	-

• Available - Not Available

Also available in retail package of 600mm, 800mm, 1000mm & 1200mm.
Please contact your Local Agents/Distributor for more information.

OPTIONAL ACCESSORIES

SH1 Housing



Order No:
WPSX7292

SH1 End Cap



Order No:
VCVX7475

SH1 Cable Retainer



Order No:
WPSX7297

SFC2 Modular Track



Order No:
TARX81

SFC2b Blank Cover



Order No:
WPSX6860

SFC2b Housing Joint Pin



Order No:
WHKX7186

SH1 Internal Corner Cap SH1 Corner Links



Order No:
VCVX7477

SH1 External Corner Cap SH1 Corner Links



Order No:
VCVX7476

DMS1 Internal Corner Cap DMS1 Corner Links



Order No:
VCVX7474

DMS1 External Corner Cap DMS1 Corner Links



Order No:
VCVX7473

DMS1 Housing



Order No:
WPSX6720

DMS1 End Cap



Order No:
VCVX7472

DS4 Data Socket Housing



Order No:
UACX117

DS3b Blank



Order No:
UACX125

KH Kitchen Hook



Order No:
WHKX6954

KR Kitchen Rail (L = 400mm)



Order No:
VCEX7037

KR Kitchen Rail (L = 600mm)



Order No:
VCEX7036

DMS1

SPECIFICATIONS

Model Number : DMS1
Order Number : TPFX94

PRODUCT FEATURES

Standard Finishing : **NSB** Natural Shot Blast
Customised Length : Maximum length is 3600mm
Please contact local Agent/Distributor for more information

Special Finishings : **WSB** White Shot Blast
THL Titanium Hair Line
BHL Black Hair Line

Customised Length : Maximum length is 2400mm
Please contact local Agent/Distributor for more information

ELECTRICAL

Rated Voltage : 250V a.c. Single-phase
Rated Current : 40Amp maximum
Frequency : 50Hz / 60Hz

MATERIAL

Basic Housing Profile : Aluminium
Track Insulation : Polycarbonate

SIZE AND WEIGHT

Overall Dimension : 150mm x 40mm x 1000mm
(Width x Depth x Length)
Weight : Estimated 3.6 kg
Warranty : 3 years subject to Eubiq Limited Warranty Statement (Applicable to track only)

STANDARD LENGTH (mm)	HOUSING		SFC2 TRACK		SFC2b BLANK COVER	
	NSB	THL	NSB	THL	NSB	THL
400	-	-	•	•	-	-
600	-	-	•	•	-	-
800	-	-	•	•	-	-
1000	-	-	•	•	-	-
1200	-	-	•	•	-	-
1400	-	-	•	•	-	-
1600	-	-	•	•	-	-
1800	-	-	•	•	-	-
2000	-	-	•	•	-	-
2200	-	-	•	•	-	-
2400	-	•	•	•	-	•
2600	-	-	-	-	-	-
2800	-	-	-	-	-	-
3000	-	-	-	-	-	-
3200	-	-	-	-	-	-
3400	-	-	-	-	-	-
3600	•	-	-	-	•	-

• Available - Not Available

ADAPTORS

PREMIUM SERIES



BS3

Premium British



GS3

Premium German



JE3

Premium Japan-Euro



JP3

Premium Japan



US3

Premium United States



FR3/FL3

Premium France



ITA3

Premium Italian



ITL3

Premium International Traveller



IN3

Premium India Combo



IS3-16

Premium India



IS3-RD16

Premium South Africa
Dedicated Red



AU3

Premium Australian



USB3

Premium USB Charger



SP3

Premium Surge Protector

COMPACT SERIES



BS2

British Compact



GS2

German Compact



JE2

Japan-Euro Compact



JP2

Japan Compact



US2

United States Compact



FR2/FL2

France Compact



ITA2

Italian Compact



ITL2

International Traveller Compact



AU2

Australian Compact

ACCESSORIES



WS13

Wall Socket



DS1

Datacom Socket Housing



DS2

Dual Gang Socket Housing



DS3

Datacom Socket Housing



DS4

Datacom Socket Housing



TR50-TS

Toggle Switch Lightholder



TR50-MS

Motion Sensor Lightholder

MULTIMEDIA CONNECTORS



VGA 15-pin Connector (DE15F)



USB Type A Connector



Serial 9-pin Connector (Male)



Stereo Audio 3.5mm Connector



Stereo Audio Connector



F Coupler Connector



TV-Radio Co-axial Connector



BNC Coupler Connector



BNC Dual Connector



S-Video Mini-Din 4-pin Connector



PS/2 Mini-Din 6-pin Connector



Audio Video (AV) Connector



RCA Audio Connector



RCA Video Connector



ON/OFF Switch (Red) 230V, 5A



ON/OFF Switch (Blue) 230V, 5A



Mounting Frame with Blank Faceplate