


# DS3 DATACOM SOCKET HOUSING

## User Guide

## Technical Specification

Product Description	: DS3 Datacom Socket Housing
Degree of Protection	: Ordinary
Material (Enclosure)	: Polycarbonate
Overall Dimension (Height x Width x Depth)	: 51mm x 26mm x 15mm
Weight	: Estimated 6.5 grams (Without Jacks)
Recommended Data Jacks (Sold Separately)	: Panduit Single-Gang Mini-Com Module Jack Systemax Single Standard M-Series Modular Jack Keystone Type Cat5e Jack - AMP, Brandrex, 3M, Clipsal, Krone Keystone Type Cat6 Jack - AMP, Brandrex, Alantek, Clipsal

## 1 Product Overview




### Recommended Data Jack Types

- a) Panduit Single-Gang Mini-Com Module Jack
- b) Systemax Single Standard M-Series Modular Jack
- c) Keystone Type Jack


\* Data jacks sold separately

## c) Keystone Type Jack Installation


Note: The outer latch of the base clip will have to be removed before installation as shown in step (i).

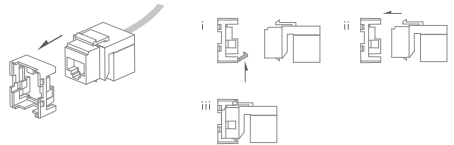


## 2 Installing Mounting Frame to Housing

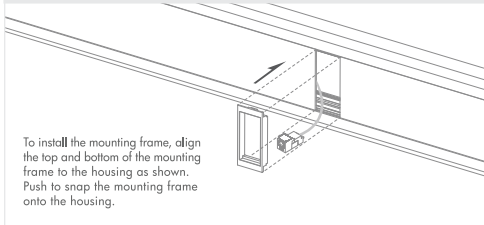


## 3 Attaching Base Clip to DS3

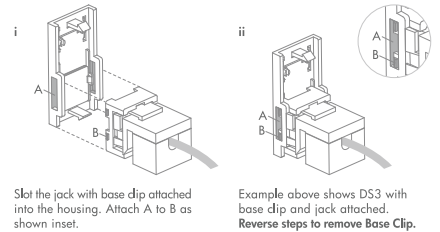


## a) Panduit Jack Installation

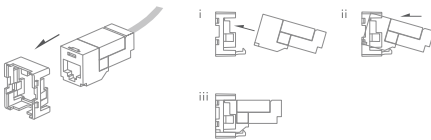

## 4 Installing DS3 to Mounting Frame

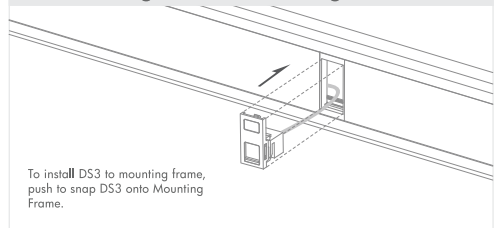

## b) Systemax Jack Installation

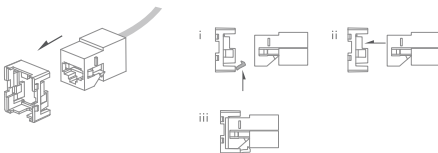

## 5 Removing DS3

